


Thermocouple temperature sensor with T handle

SFPPT K

Probe features

- Thermocouple types T, J, K and N.
- Pricking temperature probe mounted on T handle.
- Measuring range (according to cable) : from -40°C to +400°C

Part numbers

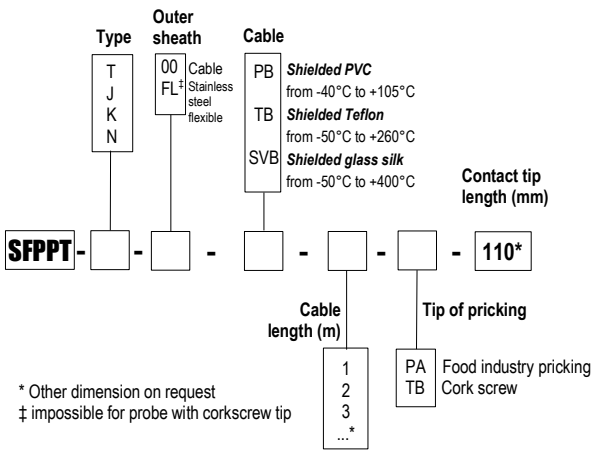

Example : SFPPTK-00-P-2-PA-110
Model : Type K thermocouple probe with insulated hot welding, outer sheath in PVC cable of 2 m length. Stainless steel contact tip Ø 4,5 mm for food industry pricking of 110 mm length with penetration tip of tube sinking type. Measuring range from -40 to +105°C.

Technical features

Working temperature.....from -40°C to +105°C for shielded PVC output
from -40°C to +260°C for TB output
from -40°C to +400°C for SVB (Tc J) output
from -40°C to +550°C for SVB (Tc K and N) output

Accuracy for class 1.....See "Tolerances" table


Storage temperature.....from -20°C to +80°C

Mounting of cable output.....Insulated hot welding mounting
With tip of food industry pricking, PE output unremovable.
With tip of cork screw pricking : compensated mini connector output .

Contact tip.....110 mm length in standard
4.5 or 8 mm Ø in 316 L stainless steel, selective length


Tip of pricking

Cork screw (to screw) : only 8 mm diameter for contact tip
Food industry pricking : contact tip diameter : 4.5 mm
Tube sinking diameter : 3 mm

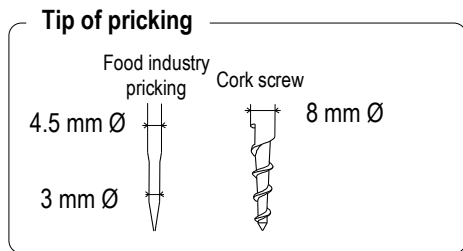


Dimensions

Food industry pricking probe

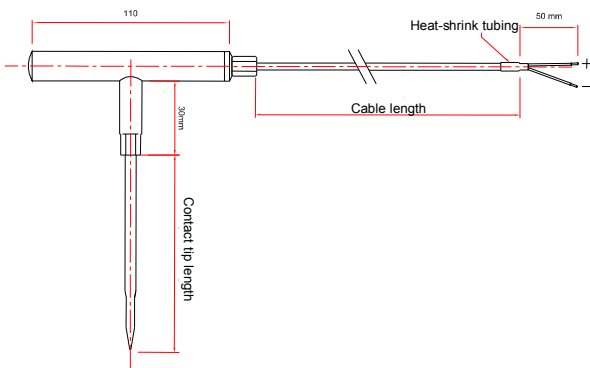

Cork screw tip probe

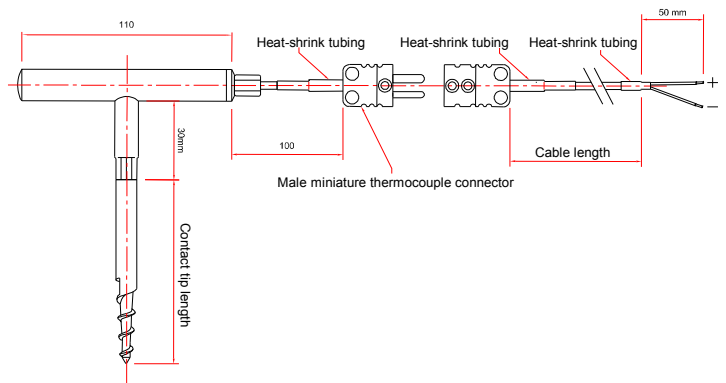

Tolerances of the probe

TC	Measuring range Class 1	TOLERANCE
T	From -40°C to +350°C	From -40°C to +125°C $\pm 0.5^\circ\text{C}$ From 125°C to +350°C $\pm 0.004 \times T^\circ\text{abs}$
J	From -40°C to +750°C	From -40°C to +375°C $\pm 1.5^\circ\text{C}$ From 375°C to 750°C $\pm 0.004 \times T^\circ\text{abs}$
K	From -40°C to +1000°C	From -40°C to +375°C $\pm 1.5^\circ\text{C}$ From 375°C to 1000°C $\pm 0.004 \times T^\circ\text{abs}$
N	From -40°C to +1000°C	From -40°C to +375°C $\pm 1.5^\circ\text{C}$ From 375°C to 1000°C $\pm 0.004 \times T^\circ\text{abs}$

Most common thermocouple types

TYPE DE THERMOCOUPLE	+ CONDUCTOR	- CONDUCTOR	COLOR OF COMPENSATING CABLE
K	Nickel-Chrome 10%	Nickel-Aluminium 5% -Silicium	Ext. color + = GREEN, - = WHITE
T	Copper	Copper-Nickel	Ext. color + = BROWN, - = WHITE
J	Iron	Copper-Nickel	Ext. color + = BLACK, - = WHITE
N	Nickel 84,4% Chromium 14,2% Silicium 1,4%	Nickel 95,6% Silicium 4,4%	Ext. color + = PINK, - = WHITE
R	Platinum-Rhodium 13%	Platinum	Ext. color + = ORANGE, - = WHITE
S	Platinum-Rhodium 10%	Platinum	Ext. color + = ORANGE, - = WHITE
B	Platinum-Rhodium 30%	Platinum-Rhodium 6%	Ext. color + = GREY, - = WHITE

Accessories (See data sheet)

- Extension cable
- Compensating cable
- Standard or miniature connector
- Cable seal for plug and socket connector
- Miniature or standard connectors panel
- Miniature or standard connectors panel
- Extension lead
- Converters

www.kimo.fr

EXPORT DEPARTMENT

Tel : + 33. 1. 60. 06. 69. 25 - Fax : + 33. 1. 60. 06. 69. 29

e-mail : export@kimo.fr



Distributed by :